

# NW 508



**Scotsman**  
Ice Systems

## Modular Ice Machine up to 225 kg

Item #:

Project:

Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 508  
Dice 10 g  
L 22 x P 22 x H 22 mm



NW H 508  
Half Dice 6 g  
L 10 x P 22 x H 28 mm



NW L 508  
Large Dice 15 g  
L 28 x P 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R404A

### VOLTAGE V/Hz/ph

230/50/1

### RECOMMENDED BINS

Head	Bins		kg
NW 508	✓	<b>SB193</b>	129
	✓	<b>SB322</b>	168
	CBT30EMCD	<b>SB393</b>	181
	CBT30EMCD	<b>SB530</b>	243

### LEGEND:

✓ : Perfect combination between ice maker and bin  
● : Ice chute cut-out performed upon installation  
CBTxxxxxxx : need additional bin top

Certifications:



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Modular Ice Machine up to 225 kg

EASY

**Scotsman®**  
Ice Systems


## Modular Ice Machine up to 225 kg

Item #:

Project:

Quantity:

# Modular Ice Machine up to 225 kg

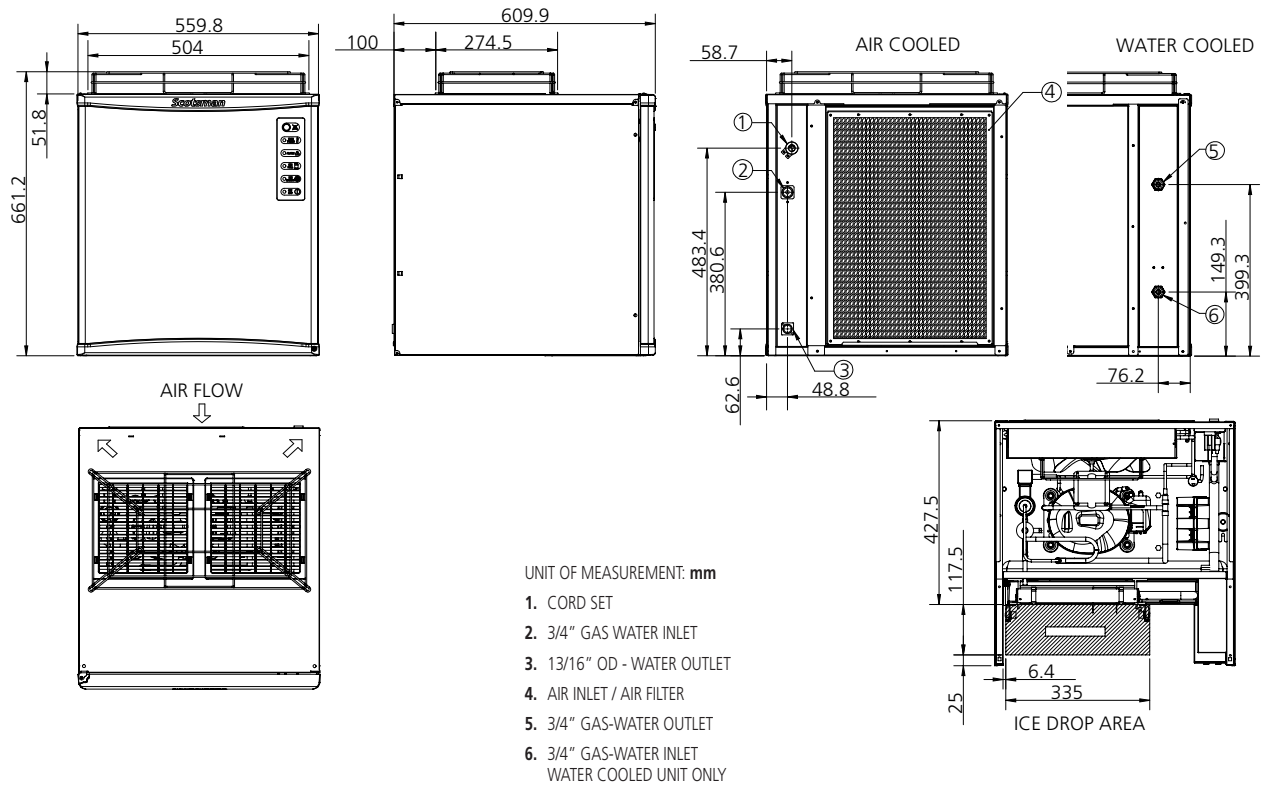

UNIT DATA				Compressor		Circuit wires		Max. fuse size
		Version	Voltage	Btu/h	W	No.	Ømm²	A
Size (W x D x H)	558 x 610 x 609 mm	NW 508 AS	230/50/1	8872	2600	3	1.5	16
Net weight	67 kg	NW 508 WS	230/50/1	0				
		NW H 508 AS	230/50/1	8872	2600	3	1.5	16
		NW H 508 WS	230/50/1	0				
		NW L 508 AS	230/50/1	8872	2600	3	1.5	16
		NW L 508 WS	230/50/1	0				
SHIPPING DATA								
Carton (W x D x H)	620 x 680 x 800 mm							
Weight	77 kg							

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 508 AS	Air	230/50/1	215	200	150	16.3	24.5	10.3	1250
NW 508 WS	Water	230/50/1							
NW H 508 AS	Air	230/50/1	225	205	155	14.8	22.9	10.1	1250
NW H 508 WS	Water	230/50/1							
NW L 508 AS	Air	230/50/1	210	200	145	15.9	23.0	9.7	1250
NW L 508 WS	Water	230/50/1							

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg